

# STRAIGHT THROUGH ABSORPTIVE DESIGN

## 15 to 20 dBA Noise Reduction


### FP-FPE OVERVIEW

Straight through design without a center panel offers good attenuation of high frequency noise with low pressure drop. Applications include small atmospheric vent applications. It can also serve as an add-on to boost overall attenuation when installed in series with an M-line chamber type silencer. FP model is for intake service and the FPE for exhaust service.

Typical Applications: Internal combustion engine intakes and exhaust, compressor intakes or fan intakes and discharges


### FEATURES

- Advanced acoustical design
- Heavy duty, all welded construction and long service life
- Easily installed in any position
- Prime coated exterior finish
- Sizes 1.5 to 3.5 have MNPT connections

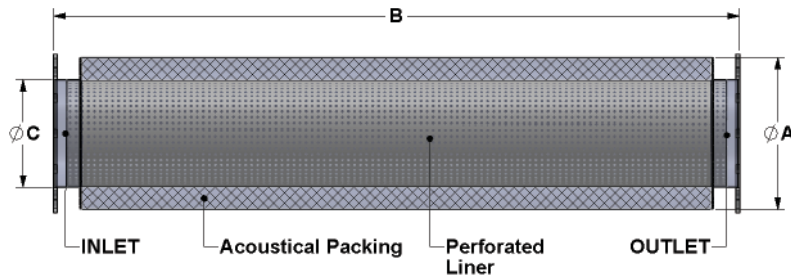

### OPTIONS / ACCESSORIES

- Horizontal or vertical support arrangements
- Special paint
- Stainless steel construction
- Complete range of exhaust accessories

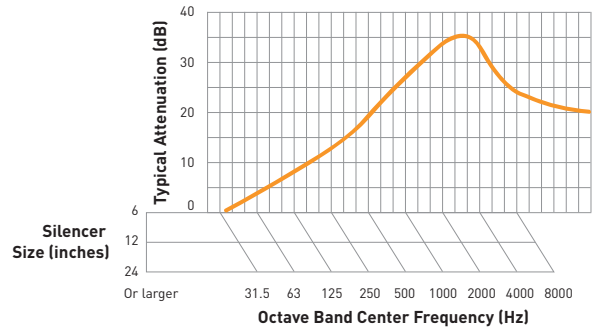

FP - FPE				
Size / ØC	ØA (FP)	ØA (FPE)	B	Est Wt
1.5	4.75	4.75	20	8
2	5	5	24	12
2.5	6	6	26	14
3	6.5	6.5	30	20
3.5	7	7	34	28
4	10	11	38	55
5	11.125	12	42	63
6	12.125	13	48	80
8	14.125	15	54	120
10	16.125	17	67	180
12	18.125	19	79	290
14	20	20	91	330
16	22	22	103	440
18	24	24	116	570
20	26	26	128	700
22	28	28	140	820
24	30	30	152	1100
26	32	32	164	1370
28	34	34	176	1560
30	36	36	188	1770

Note: Dimensions are in inches, weights are in pounds.

