

# STRAIGHT THROUGH ACOUSTICALLY PACKED BLOWER

## 15 to 30 dBA Noise Reduction


### MB11 OVERVIEW

Use for a high degree of high frequency noise attenuation on blower intakes or discharges. This model is ideal for residential areas where background noise is relatively low.

Typical applications: Rotary positive blower intake and discharge, vacuum pump intake and discharge, and centrifugal blower intake and discharge


### FEATURES

- Advanced acoustical design
- High quality sound absorbing material
- Extra heavy wall, all welded construction
- Prime coated exterior finish
- Sizes 1" through 3.5" have MNPT connections

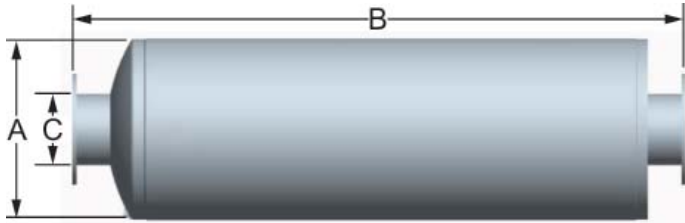

### OPTIONS / ACCESSORIES

- Flexible connectors
- Companion flanges
- Horizontal or vertical support arrangements
- Special paint
- Stainless steel construction
- Complete range of exhaust accessories

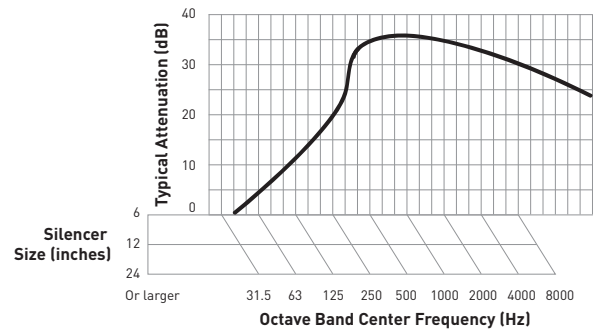

MB11			
Size / ØC	ØA	B	Est Wt
1	4.625	16	10
1.5	4.625	20	15
2	5.75	24	20
2.5	5.75	26	25
3	7	30	40
3.5	7	34	45
4	10.25	38	90
5	12	42	120
6	12	48	145
8	14	54	200
10	16	67	315
12	18	79	420
14	20	91	670
16	22	103	840
18	30	71	980
20	36	83	1370
22	36	89	1505
24	40	98	1920
26	45	106	2325
28	45	111	2495
30	50	121	2995

Note: Dimensions are in inches, weights are in pounds.