

COMBINATION ACOUSTICALLY PACKED CHAMBER BLOWER

25 to 30 dBA Noise Reduction


MB31 OVERVIEW

The MB31 provides the highest degree of overall noise attenuation on blower intakes or discharges. Use an MB31 where background noise is extremely low and the best degree of silencing is required.

Typical applications: Rotary positive blower intake and discharge


FEATURES

- Advanced acoustical design
- High quality sound absorbing material
- Packed inlet
- Prime coated exterior finish

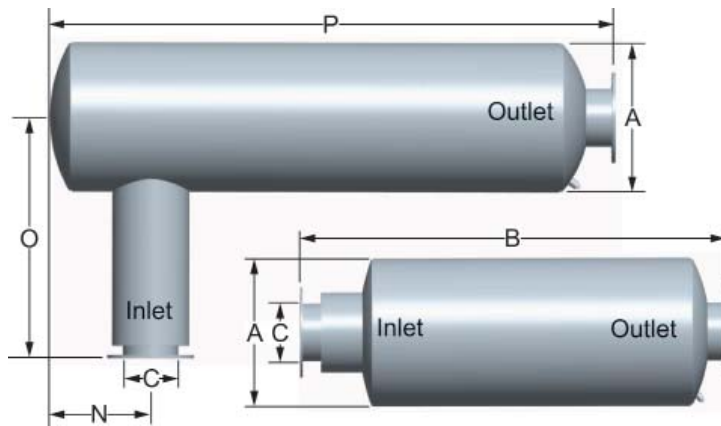

OPTIONS / ACCESSORIES

- Stainless steel or monel construction
- Flanged connections
- Standard pipe size necks
- Horizontal or vertical support arrangements
- Special paint
- Complete range of exhaust accessories

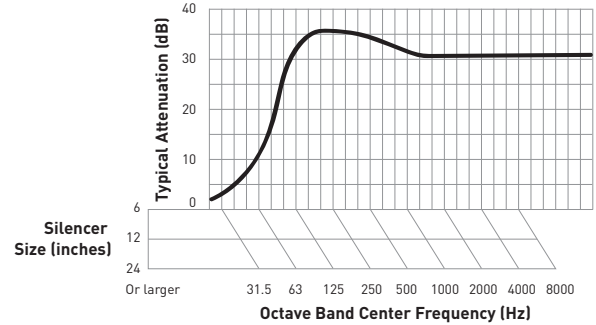

MB31							
Size / ØC	ØA	B	N Min	N Max	O	P	Est Wt
4	14	52	8.5	19	23	45	150
5	16	60	10	21.5	26	52.25	195
6	18	69	10	26.5	30	60.25	250
8	22	84	11	33.5	36	73.5	380
10	26	101	13.5	40	43	88	620
12	30	121	15	50	51	106.25	1030
14	36	115	18	44	52	99.25	1230
16	40	135	20	53	59	116.5	1815
18	45	140	25	54	58	124	2750
20	50	159	26	64	59	141.25	3210
22	54	177	29	71	60	154.25	3895
24	60	184	30	73	60	162.25	4330
26	64	204	31	84	60	180.5	5005
28	68	223	33	92	62	197.75	6625
30	72	241	34	102	62	213.75	7315
32	76	250	36.5	102.5	64	220.75	8415
34	82	252	37.5	102.5	64	220.5	8995
36	86	254	37.5	102.5	65	221	9485

Note: Dimensions are in inches, weights are in pounds.

