

MARINE ENGINE / WET EXHAUST SILENCERS

15 to 18 dBA Noise Reduction

MP11 OVERVIEW

Constructed of 316L stainless steel, the MP11 offers good noise attenuation with low pressure drop in marine exhaust systems where water is injected upstream of the silencer. Mixed exhaust flow temperature not to exceed 200°F at silencer inlet.



Typical Applications: Internal combustion engines using wet type exhaust

OPTIONS / ACCESSORIES

- Monel construction
- Flanged connections
- Horizontal or vertical support arrangements
- Complete range of exhaust accessories

FEATURES

- Advanced acoustical design
- Reduces noxious fumes and odors
- Thick wall construction for high transmission loss
- All welded construction and long service life
- Standard pipe size O.D. stubs
- Easy installation in any position

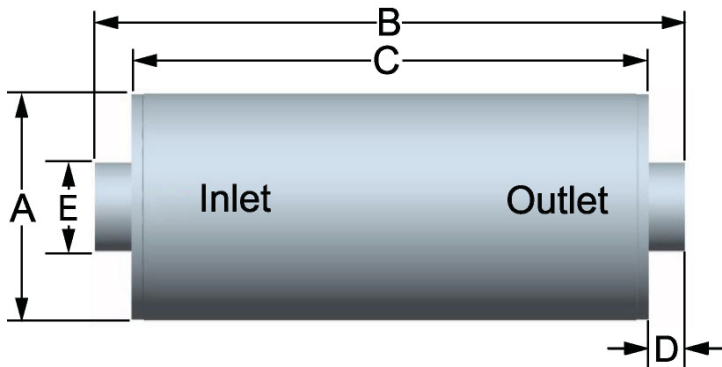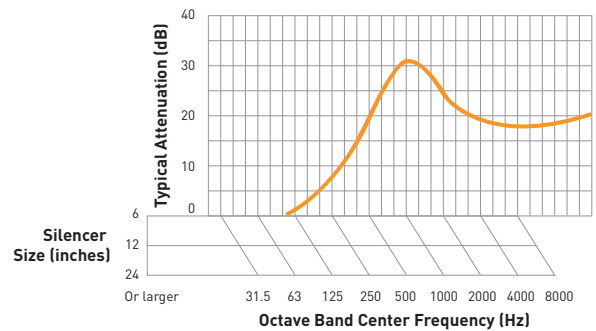

MP11					
Size / ØE	ØA	B	C	D	Est Wt
4	10.75	24	18	3	43
4.5	10.75	24	18	3	43
5	12.75	30	24	3	63
6	12.75	30	24	3	65
8	14.5	48	36	6	123
10	16.75	60	48	6	191
12	18.75	72	60	6	225

Note: Dimensions are in inches, weights are in pounds.

