

# MARINE ENGINE / WET EXHAUST SILENCERS

## 20 to 25 dBA Noise Reduction

### MP31 OVERVIEW

Constructed of 316L stainless steel, the MP31 offers very good noise attenuation with medium pressure drop in marine exhaust systems where water is injected upstream of the silencer. Mixed exhaust flow temperature not to exceed 200 °F at silencer inlet.



Typical Applications: Internal combustion engines using wet type exhaust

### OPTIONS / ACCESSORIES

- Monel construction
- Flanged connections
- Horizontal or vertical support arrangements
- Complete range of exhaust accessories

### FEATURES

- Advanced acoustical design
- Reduces noxious fumes and odors
- Thick wall construction for high transmission loss
- All welded construction and long service life
- Standard pipe size O.D. stubs
- Easy installation in any position

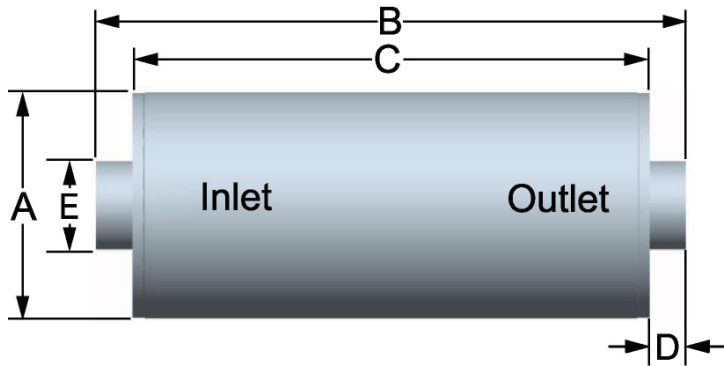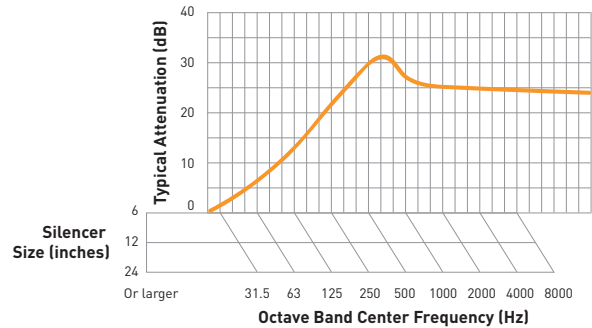

MP31					
Size / ØE	ØA	B	C	D	Est Wt
4	8.75	30	24	3	39
4.5	10.75	36	30	3	61
5	10.75	36	30	3	61
6	12.75	42	36	3	94
8	16.75	60	48	6	143
10	20.25	70	58	6	230
12	24.25	82	70	6	327

Note: Dimensions are in inches, weights are in pounds.

