

MARINE ENGINE / WET EXHAUST SILENCERS

30 to 35 dBA Noise Reduction

MP41 OVERVIEW

Constructed of 316L stainless steel, the MP41 offers very high noise attenuation in marine exhaust systems where water is injected upstream of the silencer. Mixed exhaust flow temperature not to exceed 200 °F at silencer inlet.



Typical Applications: Internal combustion engines using wet type exhaust

OPTIONS / ACCESSORIES

- Monel construction
- Flanged connections
- Horizontal or vertical support arrangements
- Complete range of exhaust accessories

FEATURES

- Advanced acoustical design
- Reduces noxious fumes and odors
- Thick wall construction for high transmission loss
- All welded construction and long service life
- Standard pipe size O.D. stubs
- Easy installation in any position

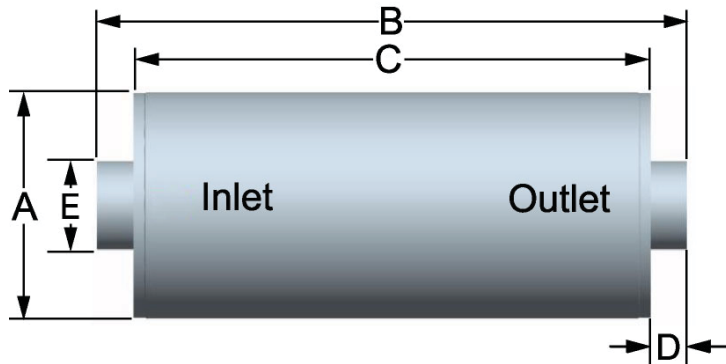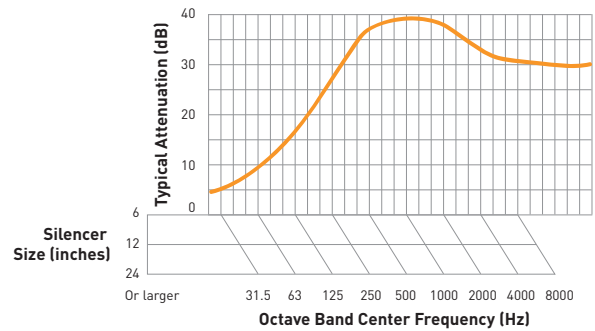

MP41						
Size / ØE	ØA	B	C	D	Est Wt	
4	10.75	54	48	3	83	
4.5	12.75	54	48	3	103	
5	12.75	54	48	3	103	
6	14.75	54	48	3	118	
8	18.75	60	48	6	167	
10	22.25	70	58	6	235	
12	26.25	82	70	6	334	

Note: Dimensions are in inches, weights are in pounds.

