

EXTREME THIN LINE SILENCER

45 to 52 dBA Noise Reduction

MR62 OVERVIEW

The MR62 is engineered to provide an extreme grade attenuation while minimizing space usage. It is designed specifically for enclosures and marine applications where silencer height is critical. Dual inlets and other custom designs can be easily incorporated. Design not only reduces surface temperature, but also radiated noise.



Typical Applications: Enclosures, as well as marine engines.

FEATURES

- Low surface temperature design
- Heavy duty, welded construction
- ANSI drilled 125/150 lb. flanges on inlet and outlet
- High-temperature, prime coated black finish
- 2" thick internal insulation within double wall construction
- Lift lugs

OPTIONS / ACCESSORIES

- Stainless steel construction: 304 or 316
- Custom inlet/outlet size, location and multiple orientation types available
- Support brackets
- Special paints and finishes available
- 1" internal insulation available
- Lift lugs
- Complete range of exhaust accessories

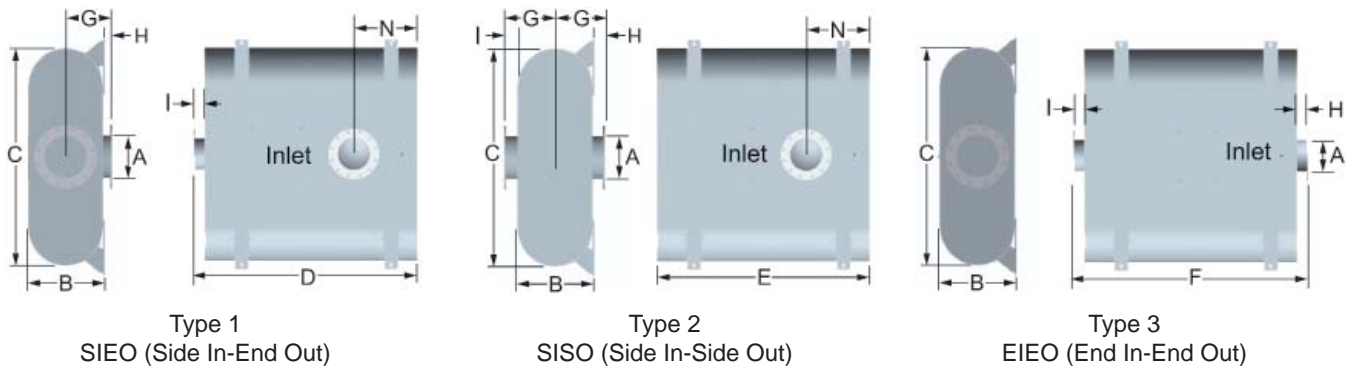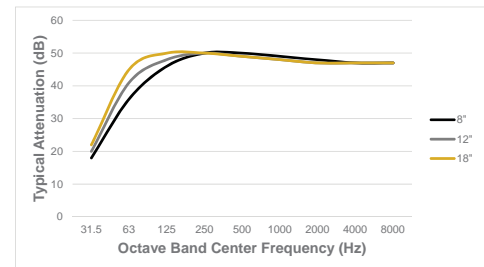

Silencer shown with optional bottom mounting brackets.

MR62										Est Wt
Size / A	B	C	D	E	F	N Min	N Max	G	H and I	w/ brackets
4	12	38	66	62	70	8	18	10	4	512
5	13	40	66	62	70	9	18	10.5	4	554
6	14	42	78	74	82	9	22	11	4	703
8	16	62	102	98	106	10	31	12	4	1473
10	18	70	108	104	112	11	32	13	4	1795
12	22	74	120	116	124	12	36	15	4	2598
14	28	78	120	116	124	13	35	18	4	2971
16	32	82	126	122	130	14	36	20	4	3411
18	34	92	150	146	154	15	45	21	4	4400
20	36	96	150	146	154	16	44	22	4	4685

Notes: Dimensions are in inches, weights are in pounds. A minimum 3" gap is recommended between the silencer and enclosure roof. Thin Line Orientations Available: Side In-End Out, Side In-Side Out, End In-End Out or Dual in options.