

LOW PRESSURE DROP/TURBO SILENCER

13 to 16 dBA Noise Reduction

MT22 OVERVIEW

The MT22 silencer is engineered to provide silencing in areas where background noise is relatively high and moderate silencing is needed, and back pressure requirements call for a low pressure drop silencer.


Typical Applications: Internal combustion engine intakes and exhausts, as well as turbo charged reciprocating engines with low allowable back pressure

FEATURES

- Advanced acoustical design
- All welded construction and long service life
- Easily installed in any position
- High heat silicone black finish
- Two chambers
- Drain connections


OPTIONS / ACCESSORIES

- Explosion relief cover
- Flexible connectors
- Companion flanges
- Cleanout openings
- Custom inlet/outlet size, location and multiple orientation types available
- Horizontal or vertical support arrangements
- Aluminized steel, Stainless Steel 304 or 316 construction available
- Special paints and finishes available
- Complete range of exhaust accessories

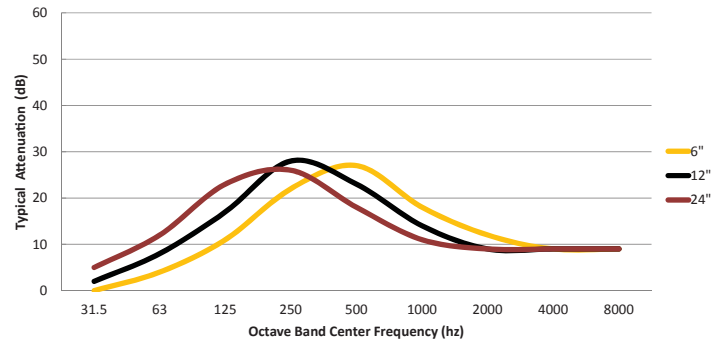

| MT22 | | | | | |
|-----------|----|-----|---|--------|--|
| Size / ØC | ØA | B | H | Est Wt | |
| 4 | 14 | 36 | 4 | 64 | |
| 5 | 16 | 43 | 4 | 87 | |
| 6 | 18 | 49 | 4 | 109 | |
| 8 | 22 | 59 | 4 | 181 | |
| 10 | 26 | 64 | 4 | 290 | |
| 12 | 30 | 77 | 4 | 440 | |
| 14 | 36 | 83 | 5 | 593 | |
| 16 | 40 | 90 | 5 | 813 | |
| 18 | 45 | 96 | 5 | 963 | |
| 20 | 50 | 109 | 5 | 1438 | |
| 22 | 54 | 119 | 5 | 1845 | |
| 24 | 60 | 125 | 5 | 2194 | |
| 26 | 64 | 140 | 5 | 2573 | |
| 28 | 68 | 155 | 5 | 2966 | |
| 30 | 72 | 166 | 5 | 3381 | |

Note: Dimensions are in inches, weights are in pounds.

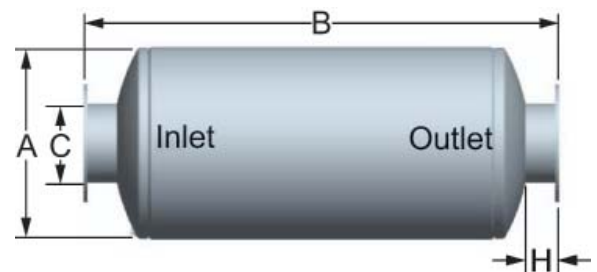

Type 1 - EIEO

