

CRITICAL LOW PRESSURE DROP/TURBO

25 to 32 dBA Noise Reduction

MT32 OVERVIEW

The MT32 silencer is a engineered to provide a critical grade attenuation with a straight thru, low pressure design. Suitable in areas where some background noise is always present and effective, but not complete silencing is needed, and back pressure requirements call for a low pressure drop silencer.


Typical Applications: Internal combustion engine intakes and exhausts, as well as turbo charged reciprocating engines with low allowable back pressure

FEATURES

- Advanced acoustical design
- All welded construction and long service life
- Easily installed in any position
- High heat silicone black finish
- Two chambers
- Drain connections


OPTIONS / ACCESSORIES

- Explosion relief cover
- Flexible connectors
- Companion flanges
- Cleanout openings
- Custom inlet/outlet size, location and multiple orientation types available
- Horizontal or vertical support arrangements
- Aluminized steel, Stainless Steel 304 or 316 construction available
- Special paints and finishes available
- Complete range of exhaust accessories

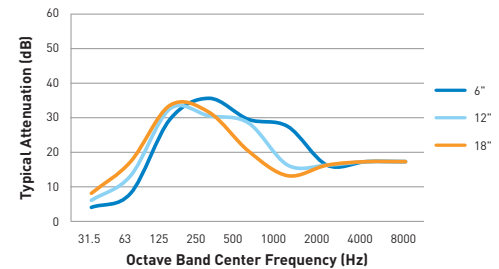

MT32				
Size / ØC	ØA	B	H	Est Wt
4	14	48	4	80
5	16	57	4	109
6	18	63	4	136
8	22	74	4	217
10	26	87	4	377
12	30	102	4	552
14	36	109	5	731
16	40	119	5	1013
18	45	127	5	1204
20	50	137	5	1754
22	54	149	5	2199
24	60	162	5	2660
26	64	183	5	3135
28	68	200	5	3589
30	72	216	5	4124

Note: Dimensions are in inches, weights are in pounds.

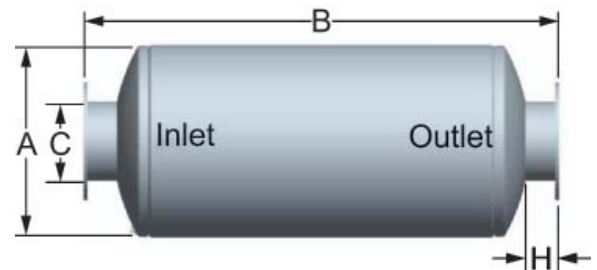

Type 1 - EIEO