

SUPER CRITICAL LOW PRESSURE DROP/TURBO

30 to 38 dBA Noise Reduction

MT42 OVERVIEW

The MT42 silencer is engineered to provide a super critical grade attenuation with a straight thru, low pressure design. Suitable in areas where ambient noise is relatively low, and back pressure requirements call for a low pressure drop silencer.


Typical Applications: Internal combustion engine intakes and exhausts, as well as turbo charged reciprocating engines with low allowable back pressure

FEATURES

- Advanced acoustical design
- All welded construction and long service life
- Easily installed in any position
- High heat silicone black finish
- Two chambers
- Drain connections


OPTIONS / ACCESSORIES

- Explosion relief cover
- Flexible connectors
- Companion flanges
- Cleanout openings
- Custom inlet/outlet size, location and multiple orientation types available
- Horizontal or vertical support arrangements
- Aluminized steel, Stainless Steel 304 or 316 construction available
- Special paints and finishes available
- Complete range of exhaust accessories

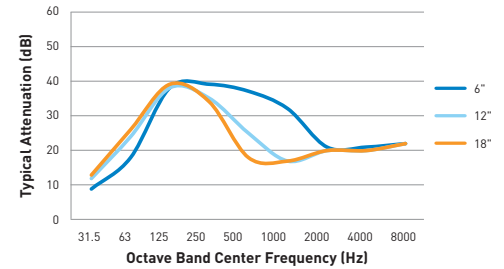

MT42				
Size / ØC	ØA	B	H	Est Wt
4	16	51	4	96
5	18	62	4	129
6	22	69	4	185
8	26	82	4	318
10	30	102	4	509
12	36	112	4	691
14	40	120	5	989
16	45	126	5	1182
18	50	135	5	1663
20	54	149	5	2156
22	60	157	5	2563
24	64	164	5	2911
26	68	184	5	3399
28	72	205	5	3921
30	78	220	5	5437

Note: Dimensions are in inches, weights are in pounds.

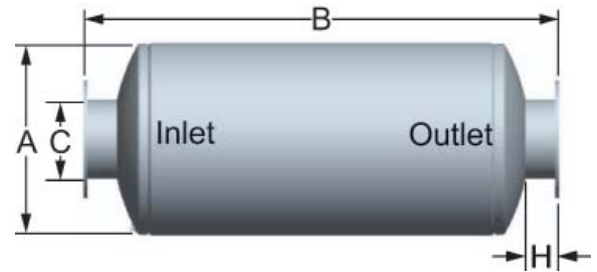

Type 1 - EIEO

