

LOW PRESSURE DROP/TURBO SILENCER

23 to 25 dBA Noise Reduction

MT52 OVERVIEW

The MT52 silencer is a engineered to provide silencing in areas where ambient noise is relatively low, and back pressure requirements call for a low pressure drop silencer.


Typical Applications: Internal combustion engine intakes and exhausts, as well as turbo charged reciprocating engines with low allowable back pressure

FEATURES

- Advanced acoustical design
- All welded construction and long service life
- Easily installed in any position
- High heat silicone black finish
- Sizes 6 and under have two chambers, 8 and above have three chambers
- Drain connections


OPTIONS / ACCESSORIES

- Explosion relief cover
- Flexible connectors
- Companion flanges
- Cleanout openings
- Custom inlet/outlet size, location and multiple orientation types available
- Horizontal or vertical support arrangements
- Aluminized steel, Stainless Steel 304 or 316 construction available
- Special paints and finishes available
- Complete range of exhaust accessories

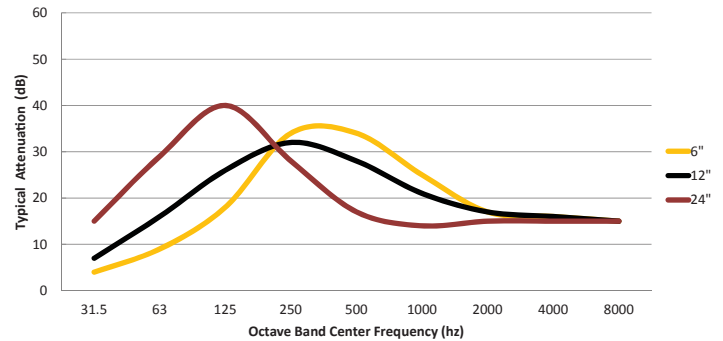

MT52				
Size / ØC	ØA	B	H	Est Wt
4	18	62	4	120
5	22	74	4	188
6	26	85	4	308
8	30	103	4	525
10	36	118	4	755
12	36	130	4	835
14	40	145	5	1235
16	45	156	5	1500
18	50	171	5	2151
20	54	185	5	2777
22	60	199	5	3351
24	64	212	5	3811
26	68	235	5	4451
28	72	268	5	5221
30	78	278	5	7051

Note: Dimensions are in inches, weights are in pounds.

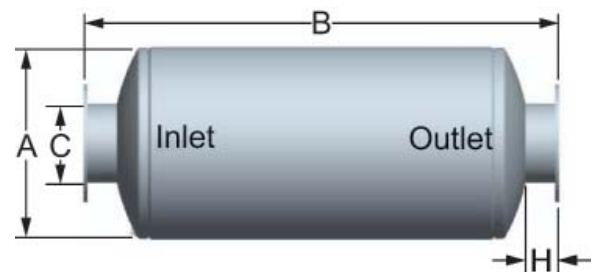

Type 1 - EIEO