20" INLET FLANGE,
5/8" PLATE, 27 1/2" O.D.
20"150# ANSI DRILL.
(20) 1 1/4" DIA. HOLES ON
25" B.C., STRADDLE C.L.

20" OUTLET FLANGE,
5/8" PLATE, 27 1/2" O.D.
20"150# ANSI DRILL.
(20) 1 1/4" DIA. HOLES ON
25" B.C., STRADDLE C.L.

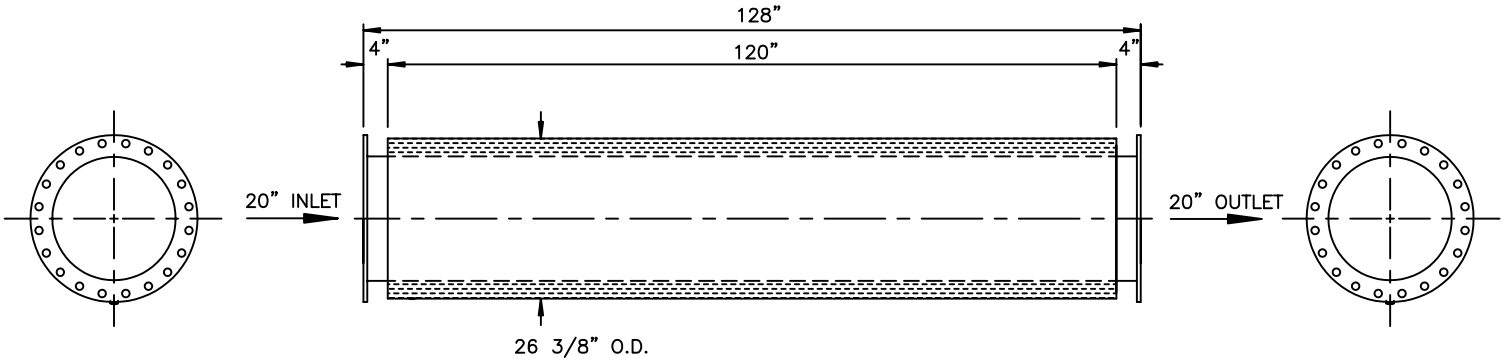

SERVICE: SUPPLEMENTARY EXHAUST SILENCER FOR ENGINE
PRESSURE DROP: NEGLIGIBLE

OCTAVE BAND:	63	125	250	500	1000	2000	4000	8000
ATTENUATION:	2	5	8	15	30	35	27	23

MATERIALS OF CONSTRUCTION:

SHELL: 10 GA (0.135") CARBON STEEL
END HEADS: 1/4" CARBON STEEL
PERFORATED INTERNALS: 10 GAGE (0.135") CARBON STEEL
ACOUSTICAL PACKING: 6 LB/CU.FT. MINERAL WOOL
FLANGES: CARBON STEEL PLATE

EXTERIOR PAINT: FLAT BLACK, HIGH TEMPERATURE

WEIGHT: 800 LBS

CERTIFICATION

CUSTOMER: _____
CUSTOMER P.O. NO.: _____

DATE: _____ BY: _____

No.	REVISIONS	APPR.

MAXIM SILENCERS

10635 BRIGHTON LANE
STAFFORD, TX 77477
PHONE (832) 554-0980
FAX (832) 554-0990

MODEL 20" FPE EXHAUST SILENCER

DRAWN	TJW	3/13/01	ORDER No.	DRAWING No.	REV
CHECKED				142-8A10684	
APPROVED			SHEET		