

Better Chamber Type Silencer: Expected Attenuation is 20 to 24 dBA

Use a model M31 in residential areas where background noise is present but not objectionable. In these areas, installation of an M31 on an engine exhaust is intended to bring the noise level down to match the ambient noise levels.

Example: In a quieter residential area off main traffic areas and away from constant noise sources.

OVERVIEW

TYPICAL APPLICATIONS




- Internal combustion engine intakes and exhausts
- Blower intakes and discharges
- Vacuum pump discharges

FEATURES

- Advanced acoustical design
- Heavy duty, all welded construction and long service life
- Easily installed in any position
- Prime coated exterior finish

OPTIONAL ACCESSORIES

- Explosion relief cover
- Flexible connectors
- Companion flanges
- Cleanout openings
- Side inlet(s)
- Side outlet
- Horizontal or vertical support arrangements
- Special paint
- Stainless steel construction

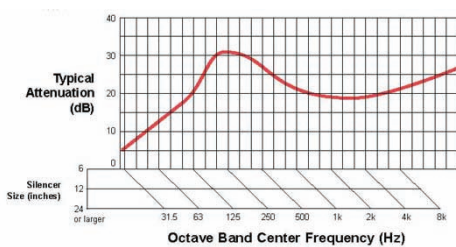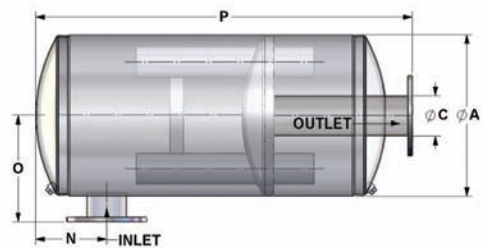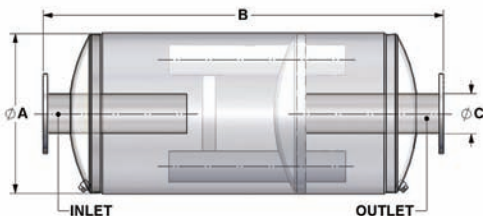

Size	A	B	C	N		O	P	Est. Wt.
				Min.	Max.			
4"	14	48	4	5 1/2	22	10	45 3/16	110
5"	16	55	5	6 1/2	25	11	52 3/16	120
6"	18	63	6	7	29 1/2	12	60 5/16	170
8"	22	76	8	8 1/2	36 1/2	14	73 3/8	285
10"	26	91	10	10 1/2	43	16 1/2	88	460
12"	30	109	12	12	53	18 1/2	106 1/8	745
14"	36	102	14	14	48	21 1/2	99 1/4	965
16"	40	119	16	17	56	23 1/2	116 3/8	1340
18"	45	127	18	19	60	26 1/2	124	1850
20"	50	144	20	21	69	29	141 1/4	2175
22"	54	161	22	22	78	31	158 1/4	2650
24"	60	165	24	24	79	34	162 1/4	3400
26"	64	183	26	26	89	36	180 1/2	3850
28"	68	200	28	27	98	38	197 3/4	4840
30"	72	216	30	29	107	40	213 3/4	5150

Note: Dimensions are in inches, weights are in pounds.