

OVERVIEW

**Straight Through, Low Pressure Drop Design:
Expected Attenuation is 16 to 19 dBA**

Use an MT31 for average silencing in areas where some background noise is always present and effective, but not complete, silencing is needed and requirements call for a low pressure drop silencer.

TYPICAL APPLICATIONS



- Internal combustion engine intakes and exhausts
- Blower intakes and discharges
- Vacuum pump discharges

FEATURES

- Advanced acoustical design
- All welded construction and long service life
- Easily installed in any position
- Prime coated exterior finish

OPTIONAL ACCESSORIES

- Explosion relief cover
- Flexible connectors
- Companion flanges
- Cleanout openings
- Horizontal or vertical support arrangements
- Special paint
- Stainless steel construction

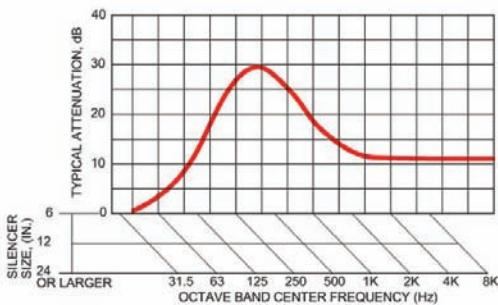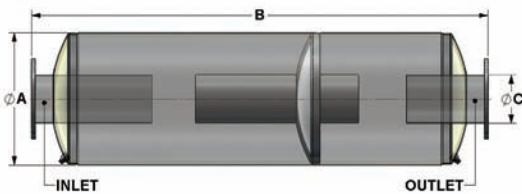

Size	A	B	C	Est. Wt.
4"	14	48	4	105
5"	16	55	5	115
6"	18	63	6	165
8"	22	76	8	280
10"	26	91	10	450
12"	30	109	12	730
14"	36	102	14	945
16"	40	119	16	1315
18"	45	127	18	1815
20"	50	144	20	2130
22"	54	161	22	2595
24"	60	165	24	3330
26"	64	183	26	3775
28"	68	200	28	4745
30"	72	216	30	5045

Note: Dimensions are in inches, weights are in pounds.