

OVERVIEW

**Straight Through, Low Pressure Drop Design:
Expected Attenuation is 19 to 22 dBA**

Use an MT41 for better than average silencing in areas where ambient noise is relatively low and back pressure requirements call for a low pressure drop silencer.

TYPICAL APPLICATIONS



- Internal combustion engine intakes and exhausts
- Blower intakes and discharges
- Vacuum pump discharges

FEATURES

- Advanced acoustical design
- All welded construction and long service life
- Easily installed in any position
- Prime coated exterior finish

OPTIONAL ACCESSORIES

- Explosion relief cover
- Flexible connectors
- Companion flanges
- Cleanout openings
- Horizontal or vertical support arrangements
- Special paint
- Stainless steel construction

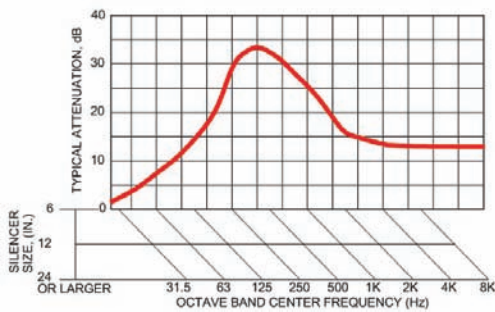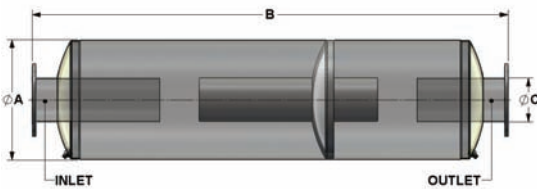

Size	A	B	C	Est. Wt.
4"	16	54	4	115
5"	18	64	5	165
6"	22	72	6	250
8"	26	85	8	380
10"	30	103	10	655
12"	36	118	12	990
14"	40	117	14	1275
16"	45	134	16	1795
18"	50	152	18	2305
20"	54	175	20	2810
22"	60	185	22	3400
24"	64	208	24	4360
26"	68	228	26	5390
28"	72	253	28	6115
30"	78	262	30	7010

Note: Dimensions are in inches, weights are in pounds.