

OVERVIEW

**Good silencing characteristics over a wide frequency range:
Expected Attenuation is 20 to 24 dBA**

Designed for smaller engine applications, the MUL is available in pipe connection sizes 1" to 3 1/2". Offering semi-critical grade silencing comparable to a model M31, an MUL is suitable for residential areas where background noise is present but not objectionable and engine exhaust noise is desired to match the ambient noise levels.

TYPICAL APPLICATIONS


- Internal combustion engine intakes and exhausts
- Blower intakes and discharges
- Vacuum pump discharges

FEATURES

- Completely welded construction of aluminized steel
- Easily installed in any position
- Long service life
- MNTP pipe connection

OPTIONAL ACCESSORIES

- External elbows
- External tailpipe
- Stainless steel construction

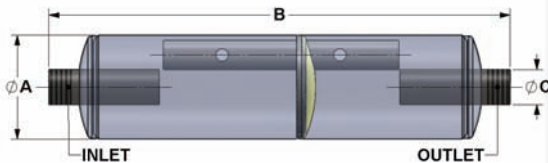

Size	A	B	C	Est. Wt.
1"	4 5/8	14 1/2	1	6
1 1/2"	5 3/4	28	1 1/2	14
2"	7	34 1/4	2	22
2 1/2"	8 1/2	42	2 1/2	34
3"	10 1/4	46	3	50
3 1/2"	12	50	3 1/2	65

Note: Dimensions are in inches, weights are in pounds.

