

LOW PRESSURE DROP/TURBO SILENCER

13 to 16 dBA Noise Reduction


MT22 OVERVIEW

The MT22 silencer is engineered to provide silencing in areas where background noise is relatively high and moderate silencing is needed, and back pressure requirements call for a low pressure drop silencer.

Typical Applications: Internal combustion engine intakes and exhausts, as well as turbo charged reciprocating engines with low allowable back pressure

FEATURES


- Advanced acoustical design
- All welded construction and long service life
- Easily installed in any position
- High heat silicone black finish
- Two chambers
- Drain connection

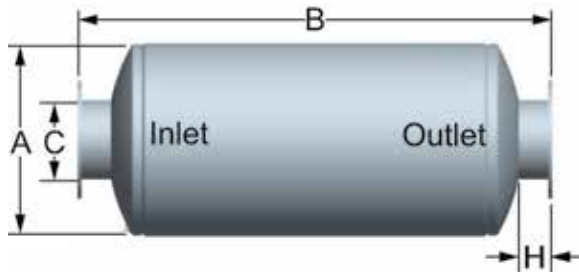

Type 1 - EIEO

OPTIONS / ACCESSORIES

- Explosion relief cover
- Flexible connectors
- Companion flanges
- Cleanout openings
- Custom inlet/outlet size, location and multiple orientations available
- Horizontal or vertical support arrangements
- Aluminized steel, Stainless Steel 304 or 316 construction available
- Special paints and finishes available
- Complete range of exhaust accessories

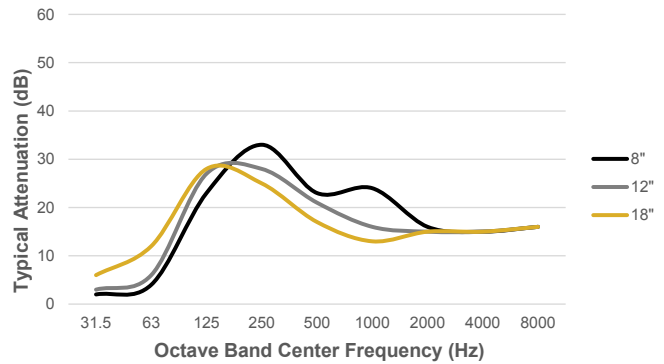

MT22					
Part No.*	Size / ØC	ØA	B	H	Est Wt
MT22-4	4	14	36	4	64
MT22-5	5	16	43	4	87
MT22-6	6	18	49	4	109
MT22-8	8	22	59	4	181
MT22-10	10	26	64	4	290
MT22-12	12	30	77	4	440
MT22-14	14	36	83	5	593
MT22-16	16	40	90	5	813
MT22-18	18	45	96	5	963
MT22-20	20	50	109	5	1438
MT22-22	22	54	119	5	1845
MT22-24	24	60	125	5	2194
MT22-26	26	64	140	5	2573
MT22-28	28	68	155	5	2966
MT22-30	30	72	166	5	3381

- All dimensions are in inches. All weights are in pounds. Weights are approximate.
- Listed sound data is based on typical performance and should not be considered absolute.
- *See [nomenclature guide](#) for additional information on part number creation.

