

# LOW PRESSURE DROP/TURBO SILENCER

## 19 to 22 dBA Noise Reduction


### MT42 OVERVIEW

The MT42 silencer is engineered to provide better than average silencing in areas where ambient noise is relatively low, and back pressure requirements call for a low pressure drop silencer.

Typical Applications: Internal combustion engine intakes and exhausts, as well as turbo charged reciprocating engines with low allowable back pressure

### FEATURES


- Advanced acoustical design
- All welded construction and long service life
- Easily installed in any position
- High heat silicone black finish
- Two chambers
- Drain connection

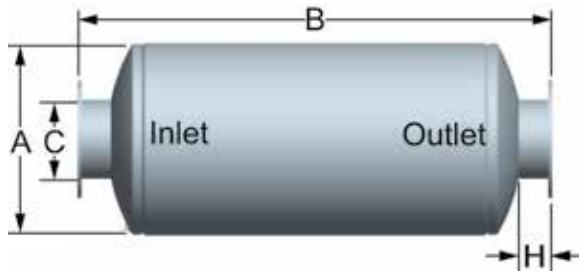

Type 1 - EIEO

### OPTIONS / ACCESSORIES

- Explosion relief cover
- Flexible connectors
- Companion flanges
- Cleanout openings
- Custom inlet/outlet size, location and multiple orientations available
- Horizontal or vertical support arrangements
- Aluminized steel, Stainless Steel 304 or 316 construction available
- Special paints and finishes available
- Complete range of exhaust accessories

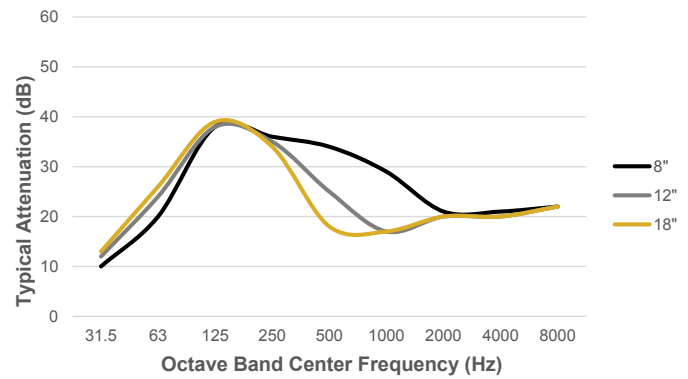

MT42						
Part No.*	Size / ØC	ØA	B	H	Est Wt	
MT42-4	4	16	51	4	96	
MT42-5	5	18	62	4	129	
MT42-6	6	22	69	4	185	
MT42-8	8	26	82	4	318	
MT42-10	10	30	102	4	509	
MT42-12	12	36	112	4	691	
MT42-14	14	40	120	5	989	
MT42-16	16	45	126	5	1182	
MT42-18	18	50	135	5	1663	
MT42-20	20	54	149	5	2156	
MT42-22	22	60	157	5	2563	
MT42-24	24	64	164	5	2911	
MT42-26	26	68	184	5	3399	
MT42-28	28	72	205	5	3921	
MT42-30	30	78	220	5	5437	

• All dimensions are in inches. All weights are in pounds. Weights are approximate.  
 • Listed sound data is based on typical performance and should not be considered absolute.  
 • \*See [nomenclature guide](#) for additional information on part number creation.

