

LOW PRESSURE DROP/TURBO SILENCER

16 to 19 dBA Noise Reduction


MT32 OVERVIEW

The MT32 silencer is engineered to provide average silencing in areas where some background noise is always present and effective, but not complete silencing is needed, and back pressure requirements call for a low pressure drop silencer.

Typical Applications: Internal combustion engine intakes and exhausts, as well as turbo charged reciprocating engines with low allowable back pressure

FEATURES


- Advanced acoustical design
- All welded construction and long service life
- Easily installed in any position
- High heat silicone black finish
- Two chambers
- Drain connection

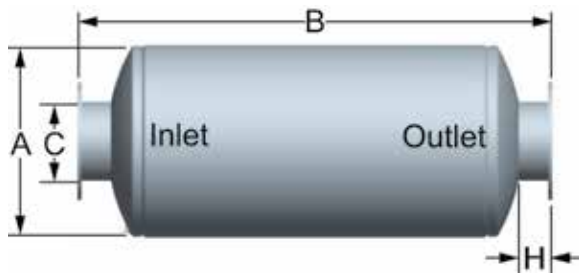

Type 1 - EIEO

OPTIONS / ACCESSORIES

- Explosion relief cover
- Flexible connectors
- Companion flanges
- Cleanout openings
- Custom inlet/outlet size, location and multiple orientations available
- Horizontal or vertical support arrangements
- Aluminized steel, Stainless Steel 304 or 316 construction available
- Special paints and finishes available
- Complete range of exhaust accessories

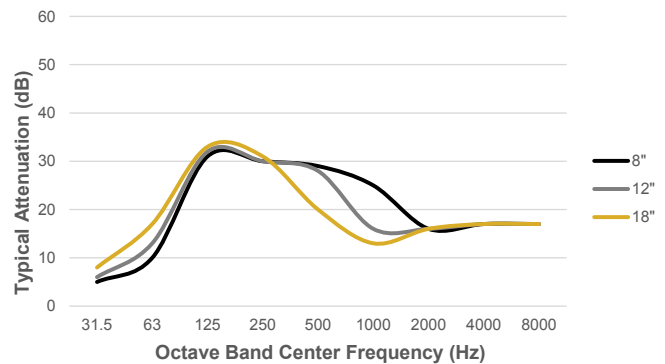

MT32					
Part No.*	Size / ØC	ØA	B	H	Est Wt
MT32-4	4	14	48	4	80
MT32-5	5	16	57	4	109
MT32-6	6	18	63	4	136
MT32-8	8	22	74	4	217
MT32-10	10	26	87	4	377
MT32-12	12	30	102	4	552
MT32-14	14	36	109	5	731
MT32-16	16	40	119	5	1013
MT32-18	18	45	127	5	1204
MT32-20	20	50	137	5	1754
MT32-22	22	54	149	5	2199
MT32-24	24	60	162	5	2660
MT32-26	26	64	183	5	3135
MT32-28	28	68	200	5	3589
MT32-30	30	72	216	5	4124

- All dimensions are in inches. All weights are in pounds. Weights are approximate.
- Listed sound data is based on typical performance and should not be considered absolute.
- *See [nomenclature guide](#) for additional information on part number creation.

